

# Rendezvous and Proximity Operations Handbook

Mission Operations Directorate  
Flight Design & Dynamics Division

Basic  
May 16, 1988



National Aeronautics and  
Space Administration

Lyndon B. Johnson Space Center  
Houston, Texas

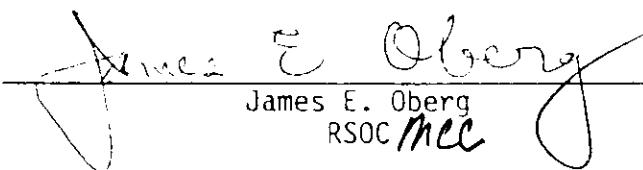
\*\*\*\*\*  
 \*\*\*\*\* NOTE: This marked-up reprint of the BASIC edition is  
 \* being published to support mission operations for the \*  
 \* LDEF rendezvous and near-term contingency rendezvous \*  
 \* activities; only obvious typographical errors have been corrected. A full REV A update to  
 \* this handbook can be expected in mid-1990 following additional flight experience and analysis activities.  
 \*\*\*\*\*

Mission Operations Directorate  
Rendezvous and Proximity Operations  
Handbook

BASIC


May 16, 1988

Prepared by:

  
\_\_\_\_\_  
James E. Oberg  
RSOC MCC

Approved by:

  
\_\_\_\_\_  
Donald J. Pearson  
Head, Orbit Dynamics Section

  
\_\_\_\_\_  
Michael F. Collins  
Chief, Orbit Analysis Branch

National Aeronautics and Space Administration  
Lyndon B. Johnson Space Center  
Houston, Texas

## ACKNOWLEDGEMENTS

The material in this book could never have been collected and verified without highly professional support from the following:

Steve Bernhardt (navigation)	Paul Kramer (engineering)
Harry Black (INCO)	Robert Lea (NAV)
Bill Britz (flight software)	Chris Meyer (PROX OPS)
Phil Burley (FDO)	Todd Miller (rendezvous)
Joseph Carroll (tethers)	Steve Nagel (crew)
Palmer Chiu (prox ops)	Claude Nicollier (crew)
Milt Contella (rendezvous)	Marty O'Hare (INCO)
Dave Dannemiller (rendezvous)	Oscar Olszewski (guido)
Alan Fox (rendezvous)	Don Pearson (rendezvous)
Rick Gavin (rendezvous)	Fisher Reynolds (IUS separation)
Marion Griffir (pointer)	Mark Rolwes (rendezvous)
Dave Harshman (rendezvous)	Dan Sedej (rendezvous)
Rick Hieb (crew)	Eric Sorensen (rendezvous)
Rick Hill (prox ops)	Mark Thomas (rendezvous)
Michael Hurt (separations)	Michael Veres (rendezvous)
Eduardo Jezierski (rendezvous)	Brian Ward (rendezvous)
Gary Johnson (breakouts)	Ed Whitsett (MMU)
Dan Johnston (rendezvous)	James Webb (GNC)
Brian Jones (flight dynamics)	Alan Wylie (navigation)
Chuck Knarr (flight director)	

Comments and critiques should be addressed to James Oberg, RSOC/JSC-DM43, x38014.

## Dedication

This book is a monument to the work of Duane Mosel (1940-1986), "Rendezvouser Supreme," leader/colleague/friend.

## CONTENTS

Section		Page
1	<u>INTRODUCTION</u>	1-1
1.1	PURPOSE . . . . .	1-1
1.2	APPROACH . . . . .	1-2
1.3	STS-UNIQUE FEATURES . . . . .	1-2
1.4	REFERENCES . . . . .	1-3
1.5	ABBREVIATIONS/ACRONYMS . . . . .	1-3
2	<u>BACKGROUND INFORMATION</u> . . . . .	2-1
2.1	DEFINITION . . . . .	2-1
2.2	CREW ASSIGNMENTS . . . . .	2-3
2.3	REFERENCE SYSTEMS . . . . .	2-4
2.3.1	Relative Motion Plots . . . . .	2-4
2.3.2	Vector definitions . . . . .	2-7
2.4	<u>ORBITAL MECHANICS EFFECTS</u> . . . . .	2-7
2.4.1	<u>Relative Motion of Two Objects Orbiting In Proximity</u> . . . . .	2-8
2.4.1.1	Above/Below (R-BAR (Radial) Separation) . . . . .	2-9
2.4.1.2	Lateral (out of plane) . . . . .	2-10
2.4.1.3	Ahead/Behind (V-BAR separation) . . . . .	2-10
2.4.2	<u>Effects of Maneuvers from a Stable Relative Position</u> . . . . .	2-11
2.4.2.1	Ahead/Behind (V-BAR Burn) . . . . .	2-12
2.4.2.2	Out of Plane . . . . .	2-13
2.4.2.3	Radial (Up/Down) . . . . .	2-13
2.4.3	<u>Use of Orbital Mechanics</u> . . . . .	2-14
2.4.3.1	Orthogonal Braking . . . . .	2-15
2.4.3.2	Motion along the R-BAR . . . . .	2-16
2.4.3.3	Approach Along the V-BAR . . . . .	2-17
2.5	<u>RENDEZVOUS PARAMETERS</u> . . . . .	2-18
2.5.1	<u>Range</u> . . . . .	2-18
2.5.2	<u>Range Rate</u> . . . . .	2-20
2.5.3	<u>Elevation</u> . . . . .	2-20
2.5.3.1	Radar Elevation . . . . .	2-20
2.5.3.2	COAS Elevation . . . . .	2-20
2.5.3.3	STRK Elevation . . . . .	2-20
2.5.4	<u>Azimuth</u> . . . . .	2-20
2.5.4.1	Radar Azimuth . . . . .	2-20
2.5.4.2	COAS Azimuth . . . . .	2-21
2.5.5	<u>Elevation Rate</u> . . . . .	2-21
2.5.6	<u>Azimuth Rate</u> . . . . .	2-22
2.6	<u>TARGET VISIBILITY</u> . . . . .	2-22
2.6.1	<u>Illumination</u> . . . . .	2-22
2.6.2	<u>Position Relative to the Sun</u> . . . . .	2-22
2.6.3	<u>Position Relative to Horizon</u> . . . . .	2-24
2.7	<u>OTHER FORCES</u> . . . . .	2-24
2.7.1	Differential Drag . . . . .	2-24
2.7.2	Differential Nodal Regression Effects . . . . .	2-27
2.8	<u>TYPES OF RENDEZVOUS MANEUVERS</u> . . . . .	2-28

Section		Page
2.8.1	<u>Generic NC, or Phase Adjust (or "closing") . . . . .</u>	2-28
2.8.2	<u>Generic NH, or Differential Height Adjust (DHA) . . . . .</u>	2-29
2.8.3	<u>Generic NPC, or Plane Change . . . . .</u>	2-29
2.8.4	<u>Generic NCC, or Corrective Combination . . . . .</u>	2-29
2.8.5	<u>Generic NSR, or Coelliptic . . . . .</u>	2-29
2.8.6	<u>Generic Ti, or Transition Initiation (Ti) . . . . .</u>	2-29
2.8.7	<u>Generic MC, or Midcourse . . . . .</u>	2-30
2.8.8	<u>Generic TF, or Terminal Phase Final . . . . .</u>	2-30
2.9	<u>TYPICAL RENDEZVOUS . . . . .</u>	2-30
2.9.1	<u>Maneuvers . . . . .</u>	2-30
2.9.1.1	The Actual NC Maneuver(s) . . . . .	2-32
2.9.1.2	The Actual NH Maneuver(s) . . . . .	2-32
2.9.1.3	The Actual NSR Maneuver . . . . .	2-32
2.9.1.4	The Actual NPC Maneuver . . . . .	2-32
2.9.1.5	The Actual NCC Maneuver . . . . .	2-32
2.9.1.6	The Actual Ti Maneuver . . . . .	2-33
2.9.1.7	The Actual Midcourse Maneuver(s) . . . . .	2-33
2.9.1.8	The Actual TF Maneuver . . . . .	2-33
2.9.2	<u>Out of Plane Control Theory and Practice . . . . .</u>	2-33
2.9.2.1	Initial Conditions . . . . .	2-33
2.9.2.2	Early Burns . . . . .	2-33
2.9.2.3	NCC . . . . .	2-34
2.9.2.4	Ti . . . . .	2-35
2.9.2.5	OOP null . . . . .	2-35
2.9.2.6	Proximity Operations . . . . .	2-36
2.9.3	<u>Typical Sensor Passes . . . . .</u>	2-37
2.9.3.1	First On-Board Acquisition . . . . .	2-37
2.9.3.2	Radar Acquisition . . . . .	2-37
2.9.3.3	Final Sensor Acquisition . . . . .	2-37
3	<u>TOOLS FOR RENDEZVOUS . . . . .</u>	3-1
3.1	<u>ATTITUDE DETERMINATION/CONTROL . . . . .</u>	3-1
3.1.1	<u>Universal Pointing (UNIV PTG, or UP) (OPS 201) . . . . .</u>	3-1
3.1.1.1	Options . . . . .	3-2
3.1.1.2	Attitude Monitor . . . . .	3-5
3.1.1.3	Enhanced Universal Pointing . . . . .	3-5
3.1.2	<u>Rotational Hand Controller and Translational Hand Controller . . . . .</u>	3-7
3.1.3	<u>SENSE Switch Options . . . . .</u>	3-8
3.1.4	<u>Attitude Direction Indicator (ADI) . . . . .</u>	3-12
3.2	<u>DIGITAL AUTO PILOT (DAP) . . . . .</u>	3-13
3.2.1	<u>DAP Management . . . . .</u>	3-13
3.2.2	<u>DAP Configuration (Spec 20) . . . . .</u>	3-15
3.2.3	<u>DAP Pushbuttons . . . . .</u>	3-16
3.2.3.1	AUTO/MAN Selection . . . . .	3-17
3.2.3.2	LVLH . . . . .	3-17
3.2.3.3	NORM/VERN Jet Select . . . . .	3-17
3.2.3.4	Translation Submodes (NORM Jets Required; MAN, MAN LVLH, and AUTO) . . . . .	3-18
3.2.3.5	Manual Rotational Submodes . . . . .	3-19

Section	Page
3.2.3.6 Applications . . . . .	3-19
3.2.4 Low Z Operations . . . . .	3-21
3.2.4.1 Plume Impingement (PI) Issues . . . . .	3-21
3.2.4.2 Low Z Operations . . . . .	3-21
3.3 RENDEZVOUS/PROX OPS SENSORS . . . . .	3-22
3.3.1 Star Tracker . . . . .	3-22
3.3.1.1 Control Switches . . . . .	3-22
3.3.1.2 Capabilities . . . . .	3-22
3.3.1.3 Lines of sight . . . . .	3-25
3.3.2 S TRK/COAS CNTRL (SPEC 22) . . . . .	3-25
3.3.2.1 ST Target Acquisition . . . . .	3-26
3.3.2.2 End ST NAV PASS . . . . .	3-29
3.3.3 Crew Optical Alignment Sight (COAS) . . . . .	3-30
3.3.3.1 System characteristics . . . . .	3-30
3.3.3.2 Position Verification . . . . .	3-30
3.3.3.3 RNDZ NAV Marks . . . . .	3-31
3.3.4 Rendezvous Radar (RR) . . . . .	3-31
3.3.4.1 Switches . . . . .	3-33
3.3.4.2 Parameters . . . . .	3-36
3.3.4.3 Other ANTENNA display (SM201) options . . . . .	3-38
3.3.4.4 Self Test . . . . .	3-38
3.3.4.5 Configure for RNDZ Radar TGT Acquisition . . . . .	3-39
3.3.4.6 RR Cue Card . . . . .	3-40
3.3.4.7 Radar Effects on Target . . . . .	3-41
3.3.5 Closed Circuit Television . . . . .	3-42
3.3.5.1 Locations . . . . .	3-43
3.3.5.2 CONTROL/DISPLAY . . . . .	3-43
3.3.5.3 Triangulation Technique . . . . .	3-43
3.3.5.4 Keel/Pallet . . . . .	3-43
3.3.5.5 RMS WRIST . . . . .	3-47
3.3.5.6 Other PLB cameras . . . . .	3-48
3.3.6 CCTV/Overlay . . . . .	3-49
3.3.7 Other Ranging Devices . . . . .	3-51
3.3.7.1 Laser Rangefinder . . . . .	3-51
3.3.7.2 Stadiometric Binoculars . . . . .	3-51
3.3.7.3 Global Positioning System . . . . .	3-51
3.3.7.4 Other . . . . .	3-51
3.3.8 Orbiter Lights . . . . .	3-51
3.3.9 Target-Mounted Sensors . . . . .	3-52
3.3.10 Target-Mounted Tracking Aids . . . . .	3-52
3.4 NAVIGATION . . . . .	3-54
3.4.1 REL NAV (SPEC 033) . . . . .	3-54
3.4.1.1 Parameters . . . . .	3-55
3.4.1.2 Processing . . . . .	3-56
3.4.1.3 REL NAV Spec Manipulation . . . . .	3-57
3.4.1.3.1 RNDZ NAV enable (Item 1) . . . . .	3-57
3.4.1.3.2 Ku-band antenna enable function (Item 2) . . . . .	3-57
3.4.1.3.3 Sensor measurement enable (Item 3) . . . . .	3-58
3.4.1.3.4 State vector select (Item 4) . . . . .	3-58
3.4.1.3.5 State vector update . . . . .	3-59

Section		Page
<u>3.4.1.3.6</u>	<u>Powered Flight NAV Controls and Displays</u>	3-59
3.4.1.3.7	<u>(Items 5, 6, 7)</u> . . . . .	3-60
3.4.1.3.8	<u>State vector transfer (Items 8, 9, 10, 11)</u> . . . . .	3-61
3.4.1.3.9	<u>RNDZ NAV filter (Items 12-25)</u> . . . . .	3-61
3.4.1.3.10	<u>RNDZ angle sensor data selection (Items 12, 13, 14)</u> . . . . .	3-61
3.4.1.3.11	<u>NAV rates (SLOW RATE, Item 15)</u> . . . . .	3-62
3.4.1.3.12	<u>COVAR REINIT (Item 16)</u> . . . . .	3-62
3.4.1.3.13	<u>Residuals</u> . . . . .	3-62
3.4.1.3.14	<u>Residual edit ratio</u> . . . . .	3-64
3.4.1.3.15	<u>Mark history, accept/reject</u> . . . . .	3-64
3.4.1.4	<u>AIF switch (EDIT OVRD - AUT/INH/FOR, Items 17-25)</u> . . . . .	3-65
3.4.1.4.1	<u>Editing Contingencies</u> . . . . .	3-66
3.4.1.4.1	<u>STRK Marks</u> . . . . .	3-66
3.4.1.4.2	<u>RR Marks</u> . . . . .	3-67
3.4.1.4.3	<u>RR/STRK Marks</u> . . . . .	3-67
3.4.1.4.4	<u>COAS Marks</u> . . . . .	3-67
3.4.1.5	<u>Definition of Stages of Relative Navigation</u> . . . . .	3-67
3.4.1.5.1	<u>Search</u> . . . . .	3-68
3.4.1.5.2	<u>Detection</u> . . . . .	3-68
3.4.1.5.3	<u>Acquisition</u> . . . . .	3-68
3.4.1.5.4	<u>Lock-On</u> . . . . .	3-68
3.4.1.5.5	<u>Data into REL NAV</u> . . . . .	3-68
3.4.1.5.6	<u>Data meets "accept" criteria</u> . . . . .	3-68
3.4.1.5.7	<u>AIF to "AUTO" (or "FORCE")</u> . . . . .	3-68
3.4.1.5.8	<u>Marks pass edit check</u> . . . . .	3-68
3.4.1.5.9	<u>NAV converged (operationally)</u> . . . . .	3-69
3.4.1.5.10	<u>NAV converged (mathematically)</u> . . . . .	3-69
3.4.1.5.11	<u>End of tracking pass</u> . . . . .	3-69
3.4.1.6	<u>Improved REL NAV</u> . . . . .	3-69
3.4.2	<u>State Vector Management</u> . . . . .	3-71
3.4.2.1	<u>State Vector Select</u> . . . . .	3-71
3.4.2.2	<u>FLTR-TO-PROP Transfer</u> . . . . .	3-71
3.5	<u>TARGETING (SPEC 034)</u> . . . . .	3-72
3.5.1	<u>General Description</u> . . . . .	3-73
3.5.1.1	<u>Target Sets</u> . . . . .	3-73
3.5.1.2	<u>Targeting Computation Techniques</u> . . . . .	3-75
3.5.2	<u>Inputs to ORB Targeting</u> . . . . .	3-75
3.5.2.1	<u>Target Number (Item 1)</u> . . . . .	3-75
3.5.2.2	<u>T1 TIG (Item 2-5)</u> . . . . .	3-76
3.5.2.3	<u>Elevation Angles (EL-Item 6)</u> . . . . .	3-77
3.5.2.4	<u>Relative Position Items</u> . . . . .	3-77
3.5.2.5	<u>T2 TIG (Items 13-16)</u> . . . . .	3-78
3.5.2.6	<u>Delta-T (Item 17)</u> . . . . .	3-78
3.5.2.7	<u>T2 Relative Position (<math>\Delta X</math>, <math>\Delta Y</math>, <math>\Delta Z</math>, Items 18-20)</u> . . . . .	3-78
3.5.2.8	<u>Base Time (Items 21-24)</u> . . . . .	3-79
3.5.3	<u>Controls</u> . . . . .	3-79
3.5.3.1	<u>T2 to T1 (Item 25)</u> . . . . .	3-79
3.5.3.2	<u>LOAD (Item 26)</u> . . . . .	3-79
3.5.3.3	<u>COMPUTE T1 (Item 27)</u> . . . . .	3-80
3.5.3.4	<u>COMPUTE T2 (Item 28)</u> . . . . .	3-80

Section		Page
3.5.4	<u>Predictor Match (PRED MATCH)</u>	3-81
3.5.5	<u>Alarms</u>	3-81
3.5.5.1	TGT $\Delta T$	3-81
3.5.5.2	TGT-ITER	3-82
3.5.5.3	TGT EL ANG	3-82
3.5.6	<u>Maneuvers</u>	3-82
3.5.7	<u>Out-of-Plane Procedures</u>	3-83
3.5.8	<u>Operational Constraints</u>	3-83
3.6	CONTROL	3-86
3.6.1	<u>PADS</u>	3-86
3.6.1.1	Basic Information	3-87
3.6.1.2	Other Systems Data	3-88
3.6.1.3	T <sub>i</sub> Delay PAD	3-88
3.6.1.4	MC PADS	3-88
3.6.2	<u>ORBIT MNVR EXEC (MM 202)</u>	3-90
3.6.2.1	OMS BOTH/L/R, RCS SEL (Items 1-4)	3-90
3.6.2.2	Thrust Vector Roll (Item 5)	3-91
3.6.2.3	Time of Ignition (Items 10-13)	3-91
3.6.2.4	PEG 7 (Items 19-21)	3-91
3.6.2.5	LOAD (Item 22)	3-91
3.6.2.6	TIMER (Item 23)	3-92
3.6.2.7	Guidance Downmoding	3-92
3.6.2.8	Burn Attitude (BURN ATT, Items 24-26)	3-92
3.6.2.9	Maneuver execute (Item 27)	3-92
3.6.2.10	Time To Next Apsis (TXX XX:XX)	3-93
3.6.2.11	Burn-related parameters	3-93
3.6.2.12	Operational Constraints	3-93
3.6.3	<u>AXIS-BY-AXIS BURNS</u>	3-96
3.7	DPS	3-97
3.7.1	<u>Configuration for Rendezvous</u>	3-97
3.7.2	<u>Off-Nominal DPS Configurations</u>	3-97
3.7.3	<u>OPS Transition Effects</u>	3-97
3.7.3.1	RNDZ NAV Termination	3-98
3.7.3.2	ORB TGTing	3-103
3.7.3.3	Attitude Control	3-103
3.7.3.4	Star Tracker	3-103
3.7.3.5	Other Effects	3-103
3.8	OMS/RCS ISSUES	3-103
3.8.1	<u>RCS Cross-Coupling</u>	3-103
3.8.1.1	Translation effects	3-105
3.8.1.2	LOS Cross-Coupling Effects	3-110
3.8.1.3	VRCS Effects	3-110
3.8.1.4	Cross-Coupling Examples	3-112
3.8.2	<u>Plumes</u>	3-114
3.8.2.1	RCS Plumes	3-114
3.8.2.2	OMS Plume	3-114
3.8.2.3	PL Plume	3-114
3.8.3	<u>Failure Modes</u>	3-114
3.8.3.1	Jet Fail On	3-114
3.8.3.2	OMS Overburn	3-119

Section		Page
3.2.3.3	<u>Loss of VRCS</u>	3-119
3.2.3.4	<u>Loss of Low Z Mode</u>	3-119
3.8.4	<u>Quantities</u>	3-120
3.8.4.1	<u>Rendezvous OMS/RCS PRPLT PAD</u>	3-120
3.8.4.2	<u>Typical Propellant Consumption</u>	3-121
3.8.4.3	<u>Propellant Saving Techniques</u>	3-122
3.8.5	<u>Special Burns</u>	3-123
3.8.5.1	<u>RCS Axis-by-Axis</u>	3-123
3.8.5.2	<u>RNDZ OMS BURN</u>	3-123
3.9	<u>OTHER SYSTEMS</u>	3-126
3.9.1	<u>Auxilliary Power Unit (APU)</u>	3-126
3.9.2	<u>PDRS</u>	3-127
3.9.3	<u>EVA</u>	3-127
3.9.4	<u>IMU</u>	3-128
4	<u>RNDZ PROCEDURE SEQUENCES</u>	4-1
4.1	<u>STANDARD OPERATIONS FLOW</u>	4-1
4.1.1	<u>Configure DPS</u>	4-5
4.1.2	<u>Set SM Timer</u>	4-5
4.1.3	<u>Configure Aft Flight Station</u>	4-5
4.1.4	<u>Ku Band Self Test</u>	4-6
4.1.5	<u>NSR burn (as required)</u>	4-6
4.1.6	<u>Enable RNDZ Navigation S/W</u>	4-7
4.1.7	<u>Initialize ORB TGT</u>	4-7
4.1.8	<u>Established RNDZ DAP</u>	4-7
4.1.9	<u>Perform NC (Phasing) Burn</u>	4-8
4.1.10	<u>Initiate -Z Target Tracking</u>	4-10
4.1.11	<u>First STRK Acquisition</u>	4-10
4.1.12	<u>Configure NAV For STRK data</u>	4-10
4.1.13	<u>STRK NAV Data Acceptance</u>	4-11
4.1.14	<u>SV Selection</u>	4-11
4.1.15	<u>Off-Nominal SV</u>	4-12
4.1.16	<u>End ST Pass</u>	4-12
4.1.17	<u>Perform NH Burn (if required)</u>	4-12
4.1.18	<u>Configure for Radar Target Acquisition</u>	4-13
4.1.19	<u>Target NCC Burn (Preliminary)</u>	4-13
4.1.20	<u>Second Star Tracker Target Acquisition</u>	4-15
4.1.21	<u>STRK Configuration</u>	4-15
4.1.22	<u>REL NAV Management</u>	4-15
4.1.23	<u>State Vector Management</u>	4-16
4.1.24	<u>Target NCC Burn (Intermediate)</u>	4-16
4.1.25	<u>End STRK NAV</u>	4-16
4.1.26	<u>Target NCC Burn (Final)</u>	4-17
4.1.27	<u>Solution Selection</u>	4-17
4.1.28	<u>Execute NCC Burn</u>	4-19
4.1.29	<u>Maneuver to -Z Track Attitude From -Y ST (off nominal)</u>	4-19
4.1.30	<u>Perform Radar Lockon</u>	4-19
4.1.31	<u>Initiate RR NAV</u>	4-19
4.1.32	<u>Off-Nominal RR NAV</u>	4-21

Section		Page
4.1.33	<u>Target Ti Burn (Preliminary)</u>	4-21
4.1.34	<u>Target Ti Burn (Intermediate)</u>	4-23
4.1.35	<u>Perform RR Auto Track Acquisition (off nominal)</u>	4-23
4.1.36	<u>Target Ti Burn (Final)</u>	4-23
4.1.37	<u>Solution Selection</u>	4-24
4.1.38	<u>Execute Ti Burn</u>	4-24
4.1.39	<u>Ti As Multi-Axis RCS Burn</u>	4-24
4.1.40	<u>Load/Execute Delay Burn (off nominal)</u>	4-25
4.1.41	<u>RMS Operations</u>	4-26
4.1.42	<u>Target MC1 Burn (Preliminary)</u>	4-26
4.1.43	<u>Verify Target Track Post Ti</u>	4-27
4.1.44	<u>ST Target Acquisition Post Ti With Confirmed Radar System Failure</u>	4-27
4.1.45	<u>SV Management</u>	4-29
4.1.46	<u>Off-Nominal Radar OPS</u>	4-29
4.1.47	<u>If Delay Burn Was Performed (off-nominal)</u>	4-29
4.1.48	<u>Target MC1 Burn (Intermediate/Final)</u>	4-29
4.1.49	<u>Execute MC1 Burn</u>	4-30
4.1.50	<u>End ST Navigation For Post Ti Data Pass (off-nominal)</u>	4-30
4.1.51	<u>Target MC2 (Preliminary/Intermediate)</u>	4-30
4.1.52	<u>Execute RNDZ Breakout If No Sensor Data Or If No Filter Convergence (off nominal)</u>	4-32
4.1.53	<u>CCTV Configuration</u>	4-32
4.1.54	<u>Perform Manual Out-of-Plane Null</u>	4-32
4.1.55	<u>Target MC2 Burn (Final)</u>	4-33
4.1.56	<u>Perform MC2</u>	4-34
4.1.57	<u>If In -Y ST Track ATT, Return to -Z Axis Target Track (off-nominal)</u>	4-34
4.1.58	<u>Target and Perform MC3 Burn</u>	4-34
4.1.59	<u>Timeline Notes for No Radar Final Phase (off-nominal)</u>	4-34
4.1.60	<u>Target and Perform MC4 Burn</u>	4-35
4.1.61	<u>Establish Inertial Line of Sight Rates</u>	4-35
4.1.62	<u>Reconfigure RR</u>	4-36
4.1.63	<u>Configure UP For V-BAR</u>	4-37
4.1.64	<u>Follow Range Braking Gates</u>	4-37
4.1.65	<u>If Range = 200 Feet Before Reaching V-BAR (off-nominal)</u>	4-38
4.1.66	<u>Configure DAP For Proximity Operations</u>	4-38
4.1.67	<u>Establish V-BAR</u>	4-39
4.1.68	<u>Adjust Closing Rate as Required</u>	4-40
4.1.69	<u>Configure Ku-Band System for Communications</u>	4-40
4.1.70	<u>Inside 60 Feet, Deselect Low Z DAP Mode</u>	4-40
4.1.71	<u>Null Rates to Perform Target Capture</u>	4-41
4.1.72	<u>Perform Flyaround of Target (off-nominal)</u>	4-41
4.1.73	<u>Capture Target With RMS</u>	4-41
4.1.74	<u>Disable Rendezvous Navigation</u>	4-41
4.2	<u>RENDEZVOUS VARIATIONS</u>	4-42
4.2.1	<u>Delayed Rendezvous</u>	4-42

Section		Page
4.2.1.1	Several Hours Delays . . . . .	4-42
4.2.1.2	24-Hour Delays . . . . .	4-42
4.2.2	<u>Preplanned Optional Return</u> . . . . .	4-43
4.2.3	<u>Contingency (Unplanned) Rendezvous</u> . . . . .	4-43
4.2.4	Ground-Up Rendezvous . . . . .	4-44
4.2.5	Multiple Rendezvous . . . . .	4-44
4.2.6	Rendezvous From Above . . . . .	4-44
4.2.7	Maneuverable Target . . . . .	4-45
4.2.8	Elliptical TGT Orbit . . . . .	4-45
4.3	RENDEZVOUS CUE CARDS . . . . .	4-45
4.3.1	<u>Execute RCS Burn Cue Card</u> . . . . .	4-45
4.3.2	<u>RR Auto Track ACQ Cue Card</u> . . . . .	4-45
4.3.3	<u>COAS Navigation Cue Card</u> . . . . .	4-45
4.3.4	<u>Rendezvous OMS/RCS PRPLT PAD</u> . . . . .	4-47
4.3.5	<u>RNDZ OMS BURN</u> . . . . .	4-47
4.3.6	<u>PROX OPS Cue Card</u> . . . . .	4-47
4.3.6.1	<u>RR/COAS Angle</u> . . . . .	4-47
4.3.6.2	<u>FWD CCTV POSITION</u> . . . . .	4-47
4.3.6.3	<u>Flyaround Velocity</u> . . . . .	4-49
4.3.6.4	<u>V-BAR Approach Rate</u> . . . . .	4-49
4.3.7	<u>Breakout</u> . . . . .	4-49
4.4	<u>FAILURE PROCEDURES</u> . . . . .	4-50
4.4.1	<u>Loss of Star Tracker(s)</u> . . . . .	4-50
4.4.2	<u>Radar Hard/Data Fail</u> . . . . .	4-50
4.4.3	<u>Loss of Verniers</u> . . . . .	4-58
4.4.4	<u>Loss of Low Z Mode</u> . . . . .	4-58
4.4.5	<u>Loss of Aft THC, RHC</u> . . . . .	4-58
4.4.6	<u>Loss of EE CCTV</u> . . . . .	4-58
4.5	<u>BACKOUT</u> . . . . .	4-59
4.6	<u>BREAKOUT</u> . . . . .	4-59
4.6.1	<u>Pre-Ti Breakout</u> . . . . .	4-60
4.6.2	<u>Ti to V-BAR Breakout</u> . . . . .	4-61
4.6.2.1	<u>For Insufficient Propellant</u> . . . . .	4-61
4.6.2.2	<u>If No TGT Sensor Data</u> . . . . .	4-61
4.6.2.3	<u>If Only Pre-Ti TGT Sensor Data</u> . . . . .	4-61
4.6.2.4	<u>If Post-Ti TGT Sensor Data</u> . . . . .	4-61
4.6.2.5	<u>To Continue the RNDZ Post MC4</u> . . . . .	4-63
4.6.3	<u>Post-V-BAR Arrival</u> . . . . .	4-63
4.7	<u>RELATIVE MOTION PLOTS</u> . . . . .	4-63
4.8	<u>FLIGHT DATA FILE DOCUMENTATION</u> . . . . .	4-63
5	<u>PROXIMITY OPERATIONS TECHNIQUES RATIONALE</u> . . . . .	5-1
5.1	<u>STATIONKEEPING</u> . . . . .	5-1
5.1.1	<u>Stationkeeping Control</u> . . . . .	5-1
5.1.1.1	<u>Attitude Control</u> . . . . .	5-2
5.1.1.2	<u>Translation Control</u> . . . . .	5-2
5.1.2	<u>Classification of Techniques</u> . . . . .	5-3
5.1.2.1	<u>Close In</u> . . . . .	5-5
5.1.2.2	<u>Short Range</u> . . . . .	5-6
5.1.2.2.1	<u>Inertially stabilized target</u> . . . . .	5-6

Section		Page
5.1.2.2.2	<u>Target attitude fixed relative to LVLH frame</u>	5-7
5.1.2.2.3	<u>TGT rotating at arbitrary rate</u>	5-8
5.1.2.3	<u>Medium Range</u>	5-9
5.1.2.4	<u>Long Range</u>	5-9
5.1.2.5	<u>Very Long Range</u>	5-11
5.1.3	<u>Operational Groundrules and Constraints</u>	5-11
5.2	<u>FLYAROUND/TRANSITION</u>	5-11
5.2.1	<u>LVLH ORB-Rate In-Plane Flyaround</u>	5-13
5.2.1.1	<u>Clockwise Orbit Rate Flyaround</u>	5-13
5.2.1.2	<u>Counterclockwise Orbit Rate Flyaround</u>	5-14
5.2.2	<u>LVLH Out of Plane</u>	5-15
5.2.3	<u>Arbitrary Rate Flyrounds</u>	5-15
5.2.3.1	<u>Single Axis</u>	5-15
5.2.3.2	<u>Multiple-Axis Auto Rotation Maneuver</u>	5-15
5.2.3.3	<u>LVLH (Inertial) Orbiter/TGT Alignment Procedure</u>	5-16
5.2.3.4	<u>Manual Rotation Maneuver</u>	5-17
5.2.4	<u>Auto Targeted Trajectory</u>	5-17
5.2.5	<u>LOS Rate Techniques</u>	5-17
5.3	<u>FINAL APPROACH</u>	5-21
5.3.1	<u>Braking Techniques</u>	5-21
5.3.1.1	<u>Normal Z-axis Mode Braking</u>	5-21
5.3.1.2	<u>Low Z Mode Braking</u>	5-22
5.3.1.3	<u>X-Axis Mode Braking</u>	5-23
5.3.1.4	<u>Orbital Mechanics Effects Braking</u>	5-24
5.3.2	<u>Final Approach Techniques</u>	5-25
5.3.2.1	<u>Direct Approach</u>	5-25
5.3.2.2	<u>V-BAR Approach</u>	5-28
5.3.2.3	<u>R-BAR Approach</u>	5-29
5.3.2.4	<u>Inertial Approach</u>	5-34
5.4	<u>SEPARATION</u>	5-35
5.4.1	<u>Nominal</u>	5-36
5.4.1.1	<u>Spring Ejection (PAM)</u>	5-36
5.4.1.2	<u>Spring Ejection (IUS)</u>	5-42
5.4.1.3	<u>RMS Deploy - Generic</u>	5-44
5.4.1.4	<u>RMS Deploy (SPARTAN - class)</u>	5-46
5.4.1.5	<u>RMS Deploy (HST - class)</u>	5-48
5.4.2	<u>Generic Sep Procedure</u>	5-49
5.4.2.1	<u>Set Up Aft Station</u>	5-49
5.4.2.2	<u>Obtain Visual Contact Through OVHD Window</u>	5-50
5.4.2.3	<u>Null Closing Rate</u>	5-50
5.4.2.4	<u>Perform RR ACQ (If Desired)</u>	5-51
5.4.2.5	<u>Obtain ~1 FPS Opening Rate</u>	5-51
5.4.2.6	<u>Perform Out-of-Plane MNVR</u>	5-52
5.4.2.7	<u>Perform Final SEP</u>	5-53
5.4.2.8	<u>Maneuver To Minimum Drag Attitude (-ZLV)</u>	5-54
5.4.3	<u>Contingency</u>	5-54
5.4.3.1	<u>Rendezvous Breakout Procedure</u>	5-55
5.4.3.2	<u>Prox OPS Breakout Procedure</u>	5-56
5.4.3.3	<u>Jettison</u>	5-57
5.4.3.4	<u>Inadvertent Release</u>	5-62

## TABLES

Table	Page
4-1 PROPELLANT PENALTY . . . . .	4-25
4-2 RR/ST STATUS/ACTION . . . . .	4-51
4-3 BREAKOUT MANEUVER SELECTION . . . . .	4-60
5-1 SUMMARY OF STATIONKEEPING CLASSIFICATIONS . . . . .	5-4
5-2 SUMMARY OF STATIONKEEPING CONTROL . . . . .	5-5

## FIGURES

Figure		Page
1-1	Handbook entry points and interrelationship . . . . .	1-1
2-1	Relative motion plot, circular orbits . . . . .	2-5
2-2	Relative motion plot, elliptical chaser orbit . . . . .	2-5
2-3	Tangential orbits . . . . .	2-6
2-4	Intersecting orbits . . . . .	2-7
2-5	Target-centered frame (rotating at ORB rate) . . . . .	2-8
2-6	Radial separation relative motion . . . . .	2-9
2-7	Out-of-plane parallel motion . . . . .	2-10
2-8	Two satellites on V-BAR . . . . .	2-11
2-9	V-BAR burn effects . . . . .	2-12
2-10	Impulse out of plane . . . . .	2-13
2-11	R thrusting effects . . . . .	2-14
2-12	Orthogonal braking . . . . .	2-15
2-13	Orbital mechanics effects in separating . . . . .	2-16
2-14	Orbital mechanics effects in braking . . . . .	2-17
2-15	V-BAR approach technique . . . . .	2-19
2-16	Orbiter vehicle coordinate system and Ku-band antenna slewing directions . . . . .	2-21
2-17	Angle to the Sun during terminal phase . . . . .	2-23
2-18	Horizon depression angle as a function of orbital attitude . . . . .	2-24
2-19A	Illustrative differential drag effects, Orbiter and small free-flier,* as a function of orbital attitude . . . . .	2-25
2-19B	Drag effects on function of Orbiter and payload attitude variations . . . . .	2-26
2-20	Plane shift due to equatorial bulge . . . . .	2-28
2-21	Typical target centered relative motion (ground up rendezvous) . . . . .	2-31
2-22	Out-of-plane motion . . . . .	2-34
2-23	Spectrum of rendezvous sensors . . . . .	2-36
3-1	The UNIV PTG (OPS 201) display . . . . .	3-1
3-2	RHC soft/hard stop logic . . . . .	3-7
3-3	Aft station control, sense switch . . . . .	3-9
3-4A	Aft and overhead line-of-sight references, aft RCH use . . . . .	3-10
3-4B	Aft and overhead line-of-sight references, aft THC use . . . . .	3-11
3-5	Aft station ADI displays and controls . . . . .	3-12
3-6	DAP configurations for rendezvous/prox ops . . . . .	3-14
3-7	The DAP CONFIG (SPEC 20) display . . . . .	3-15
3-8	Panel A6 . . . . .	3-18
3-9	RCS plume overpressure for LOW Z and NORMAL Z mode (lb/ft <sup>2</sup> ) . . . . .	3-20
3-10	Panel 06 . . . . .	3-23
3-11	STRK/COAS geometry . . . . .	3-24
3-12	The S TRK/COAS CNTL display . . . . .	3-26

Figure		Page
3-13	S TRK TARGET ACQ procedure . . . . .	3-27
3-14	STRK search pattern . . . . .	3-29
3-15	END S TRK NAV procedure . . . . .	3-29
3-16	The COAS reticle pattern (-Z view from AFT crew station) . . . . .	3-31
3-17	Orbiter body coordinate system and RR coordinate system . . . . .	3-32
3-18	Panel A1U . . . . .	3-34
3-19	RR steering modes . . . . .	3-36
3-20	Panel A2 . . . . .	3-37
3-21A	Configure for RR TARGET ACQ . . . . .	3-39
3-21B	RR AUTO TRACK ACQ . . . . .	3-41
3-22	Induced volts/meter on target . . . . .	3-42
3-23	Panel A7U. Camera command & video input/output . . . . .	3-44
3-24	Panel A3 . . . . .	3-44
3-25	Use of bulkhead cameras tilt angles to determine range . . . . .	3-45
3-26	Triangulation chart . . . . .	3-46
3-27	Keel camera . . . . .	3-47
3-28A	Use of RMS wrist camera to determine range rate . . . . .	3-48
3-28B	EE CCTV object motion overlay . . . . .	3-49
3-29	Typical ranging overlay . . . . .	3-50
3-30	Effect of corner reflectors on radar cross section . . . . .	3-53
3-31	The REL NAV (SPEC 033) display . . . . .	3-55
3-32	ORB TGT display . . . . .	3-74
3-33	Projected TGT sets . . . . .	3-76
3-34	Typical BURN PAD . . . . .	3-87
3-35	Ti delay pad . . . . .	3-88
3-36	Typical NC PAD . . . . .	3-89
3-37	The ORBIT MMVR EXEC (MM202) display . . . . .	3-89
3-38	RNDZ NAV safety . . . . .	3-99
3-39	RNDZ NAV recovery . . . . .	3-101
3-40	DAP vs translational cross-coupling (unit less ratio value) * = same as NORM . . . . .	3-105
3-41	RCS jets . . . . .	3-106
3-42	RCS axis cross-coupling values . . . . .	3-107
3-43	PRCS cross-coupling ratios . . . . .	3-108
3-44	PRCS off-nominal cross-coupling ratios . . . . .	3-109
3-45	TGT LOS cross coupling aft THC, -Z sense 200 foot range . . . . .	3-109
3-46	VRCS cross-coupling . . . . .	3-111
3-47	VRCS cross coupling ratios . . . . .	3-113
3-48	Nom. Z RCS plume pressure fields . . . . .	3-115
3-49	Low Z RCS plume pressure fields . . . . .	3-116
3-50	OMG pulse for single engine burn . . . . .	3-117
3-51	Safe distance for firing liquid propulsion engines . . . . .	3-118
3-52	Rendezvous OMS/RCS PRPLT PAD . . . . .	3-120
3-53	RCS RPLT cue card . . . . .	3-123
3-54	Perform RPLT OMS burn . . . . .	3-124
3-55	OMS 2/3rd 1/3 burns cue card . . . . .	3-125

Figure		Page
4-1	Spartan rendezvous profile . . . . .	4-2
4-2	Spartan rendezvous profile . . . . .	4-3
4-3	Spartan rendezvous profile . . . . .	4-4
4-4	Configure aft flight station for RNDZ . . . . .	4-6
4-5	Perform NC burn . . . . .	4-9
4-6	Perform NH burn . . . . .	4-13
4-7	Target NCC burn . . . . .	4-14
4-8	RR navigation . . . . .	4-20
4-9	Target Ti burn . . . . .	4-22
4-10	Execute Ti burn . . . . .	4-24
4-11	Load delay burn . . . . .	4-26
4-12	TARGET MC 2 (Preliminary solution) . . . . .	4-30
4-13	LONG/SHORT terminology . . . . .	4-31
4-14	Manual out-of-plane null . . . . .	4-33
4-15	Target MC2 (final solution) . . . . .	4-33
4-16	Establish inertial LOS rates . . . . .	4-35
4-17	Configure for V-BAR . . . . .	4-36
4-18	Braking gates . . . . .	4-37
4-19	"HOT" approach ("short" case) . . . . .	4-38
4-20	Transition to V-BAR . . . . .	4-39
4-21	Establish V-BAR . . . . .	4-39
4-22	Adjust closing rate . . . . .	4-40
4-23	Disable rendezvous NAV . . . . .	4-41
4-25	COAS navigation cue card . . . . .	4-46
4-26	PROX OPS cue card . . . . .	4-48
4-27	RROX OPS sensor trigonometry . . . . .	4-49
4-28	RR Fail . . . . .	4-52
4-29	Region determinator . . . . .	4-54
4-30	Dispersed sunrise points . . . . .	4-55
4-31	Uncompensated coupling effects . . . . .	4-56
4-32	Calculation of -X ΔV required to stop on V-BAR . . . . .	4-57
4-33	Relative motion plots . . . . .	4-63
5-1	Inertially stabilized target . . . . .	5-7
5-2	Target fixed in LVLH reference frame . . . . .	5-8
5-3	Auto ellipse . . . . .	5-10
5-4	Transition geometry . . . . .	5-12
5-5	Flyaround of an LVLH attitude hold TGT . . . . .	5-13
5-6	Counterclockwise flyaround . . . . .	5-14
5-7	Trim Orbiter/TGT alignment . . . . .	5-16
5-8	Transition to the V-BAR . . . . .	5-18
5-9	Orbiter stabilized on the V-BAR . . . . .	5-19
5-10	Angle rates versus V-BAR stability . . . . .	5-20
5-11	Angle rates versus V-BAR approach . . . . .	5-21
5-12	Normal Z axis braking . . . . .	5-22
5-13	Low Z axis braking . . . . .	5-23
5-14	+X axis braking . . . . .	5-23
5-15	Orbital mechanics forces during an R-BAR approach . . . . .	5-24
5-16	Typical final approach techniques . . . . .	5-26

Figure		Page
5-17	Direct approach to close-in stationkeeping . . . . .	5-27
5-18	V-BAR approach . . . . .	5-28
5-19	Generic R-BAR approach technique . . . . .	5-29
5-20	Typical R-BAR approach profile . . . . .	5-30
5-21	LDEF R-BAR approach . . . . .	5-32
5-22	ESTABLISH R-BAR procedure . . . . .	5-33
5-23	Post-grapple maneuvers . . . . .	5-34
5-24	PAM/Orbiter ejection attitude . . . . .	5-37
5-25	Orbiter/PAM-D separation trajectory (due to ejection ΔV only) . . . . .	5-38
5-26	OMS plume on PAM-D at SFP burn initiate . . . . .	5-39
5-27	Orbiter attitude at PAM ejection . . . . .	5-40
5-28	View of PAM-D SEP from aft station through overhead window (PL shown every 30 sec) . . . . .	5-41
5-29	Orbiter window protection attitude at SRM ignition . . . . .	5-42
5-30	Typical RMS deploy geometry (Orbiter below PL) . . . . .	5-44
5-31	Orbiter separation following RMS deploy (PL-centered LVLH frame of reference) . . . . .	5-45
5-32	Set up aft station checklist . . . . .	5-49
5-33	Visual contact through OVHD window checklist . . . . .	5-50
5-34	Null closing rate checklist . . . . .	5-50
5-35	Perform RR ACQ checklist . . . . .	5-51
5-36	Obtain ~ 1 FPS opening rate checklist . . . . .	5-51
5-37	Perform out of plane MNVR checklist . . . . .	5-52
5-38	Perform final SEP checklist . . . . .	5-53
5-39	Maneuver to minimum drag attitude checklist . . . . .	5-54
5-40	Rendezvous breakout procedure checklist . . . . .	5-55
5-41	PROX OPS breakout procedure checklist . . . . .	5-56
5-42	AUTO MNVR to -XLV checklist . . . . .	5-58
5-43	Configure CCTV's checklist . . . . .	5-59
5-44	"Damp Rate" checklist . . . . .	5-59
5-45	Separation checklist . . . . .	5-60
5-46	Second SEP burn . . . . .	5-60
5-47	New attitude . . . . .	5-61
5-48	Orbiter separation trajectory following RMS and/or PL jettison . . . . .	5-61
5-49	Generic ("1-2-3") separation . . . . .	5-62
6-1	FCR console layout . . . . .	6-1
6-2	Rendezvous real-time support . . . . .	6-2
6-3	RNDZ team . . . . .	6-3
6-4	RNDZ display in MCC . . . . .	6-4
<del>7-1</del>	<del>Origin of "Gravity-Gradient" forces . . . . .</del>	<del>7-5</del>
7-2	<del>Line-tension techniques . . . . .</del>	<del>7-10</del>
7-3	<del>Tethered OPS control display . . . . .</del>	<del>7-15</del>
7-4A/B	<del>CCTV arrangement/TSS-D boom/pallet . . . . .</del>	<del>7-17</del>
7-5	<del>Deployment technique . . . . .</del>	<del>7-18</del>
7-6	<del>Hanging release . . . . .</del>	<del>7-19</del>